

Specification for **60leds 3528SMD strip**

Applications:

Suitable for cove and contour lighting etc. in KTV, hotel, shopping mall, home, cabinet and so on

Features:

1. 3528SMD LED mounted, 60leds/m.
2. 3 types strip, IP33,IP65 and IP67
3. DC12V
4. 115 Viewing angle
5. Certificate: CE,RoHS
6. Warranty: 3years
7. 3leds per unit can be cut
8. Easy installation with double-sided adhesive tape.

1. Model: S1A60

Non-waterproof, IP 33

Size: L5000 X W8 X H2.4 mm


LED Pitch: 16.7mm

Unite Length: 50mm

Max. 5meters per roll



Drawing:

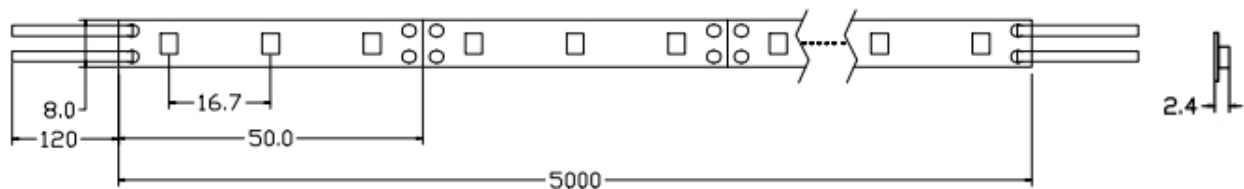

Specification for 60leds 3528SMD strip

2. Model: S2A60

Waterproof with silicone glue, IP 65

Size: L5000 X W8 X H3.0 mm


LED Pitch: 16.7mm

Unite Length: 50mm

Max. 5meters per roll



Drawing:

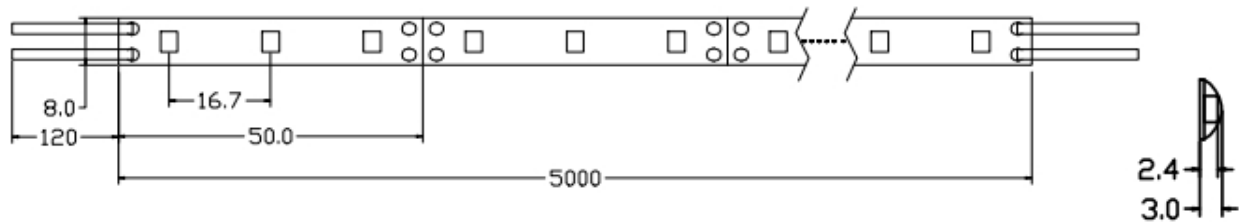

3. Model: S3A60

Waterproof with silicone tube, IP 67

Size: L5000 X W11 X H4.4 mm


LED Pitch: 16.7mm

Unite Length: 50mm

Max. 5meters per roll



Drawing:

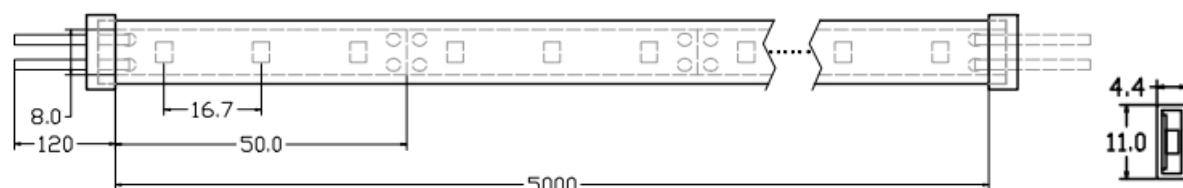

Copyright © 2001-2010

New Vision Industrial Co.,LTD

Email: sales@nvleds.com Website: www.nvleds.com

Specification for 60leds 3528SMD strip

Specification:

Model No.	S1A60/ S2A60/ S3A60				
Color	W	R	G	B	Y
Color Temperature (K) Wavelength (nm)	3000/6000/9000	620-625	525-530	465-470	585-590
Working Voltage	DC12V				
Beam Angle	115 degree Viewing Angle				
Brightness (lm/m)	360	180	240	90	150
Current (mA/m)	20	30	20	20	30
Power (w/m)	4.8	7.2	4.8	4.8	7.2
Operating Temperature	-25°C- 60°C				
Storage Temperature	-30°C- 70°C				
IP Grade	IP33/ IP65/ IP67				