

Specification for **30leds** RGB 5050SMD strip

Applications:

Suitable for cove and contour lighting etc. in KTV, hotel, shopping mall, home, cabinet and so on

Features:

1. RGB 5050SMD LED mounted, 30leds/m.
2. 3 types strip, IP33,IP65 and IP67
3. DC12V
4. 115 Viewing angle
5. Certificate: CE,RoHS
6. Warranty: 3years
7. 3leds per unit can be cut
8. Easy installation with double-sided adhesive tape.

1. Model: S1Q30

Non-waterproof, IP 33

Size: L5000 X W10 X H2.2 mm


LED Pitch: 33.3mm

Unite Length: 100mm

Max. 5meters per roll



Drawing:

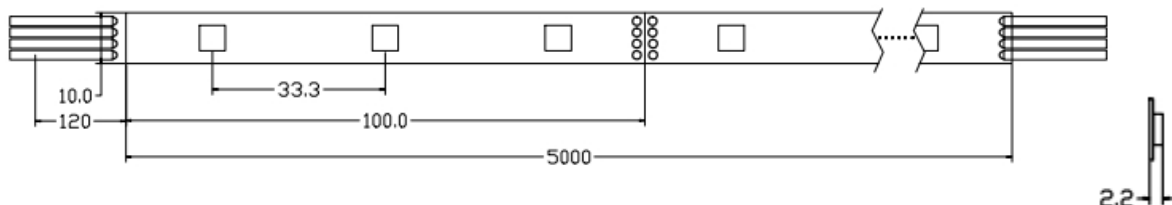

Specification for 30leds RGB 5050SMD strip

2. Model: S2Q30

Waterproof with silicone glue, IP 65

Size: L5000 X W10 X H3.3 mm


LED Pitch: 33.3mm

Unite Length: 100mm

Max. 5meters per roll



Drawing:

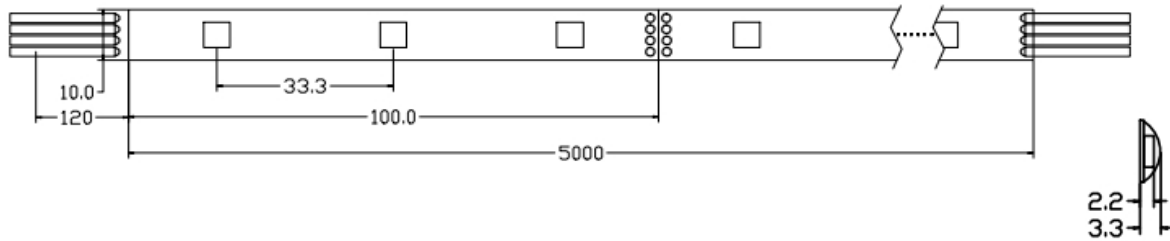

3. Model: S3Q30


Waterproof with silicone tube, IP 67

Size: L5000 X W13 X H4.4 mm


LED Pitch: 33.3mm

Unite Length: 100mm

Max. 5meters per roll

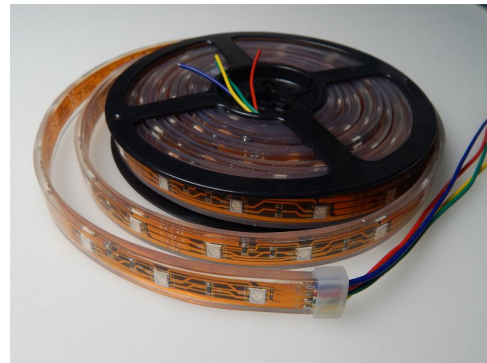

Drawing:

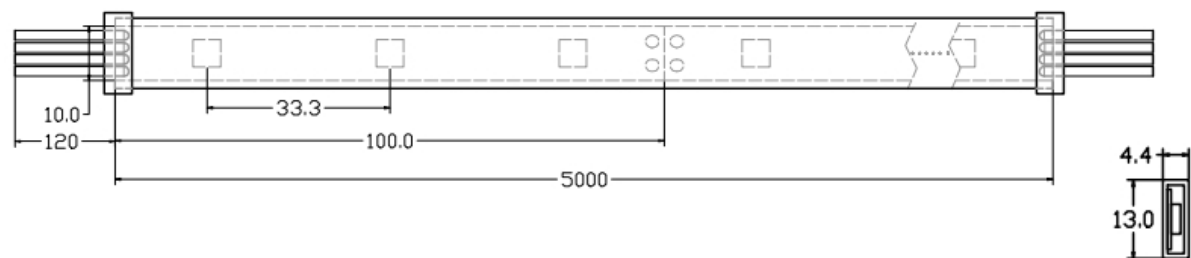

Specification for **30leds** RGB 5050SMD strip

Specification:

Model No.	S1Q30/ S2Q30/ S3Q30
Color	RGB
Working Voltage	DC12V
Beam Angle	115 degree Viewing Angle
Brightness (lm/m)	R:120/ G:180/ B:60
Current (mA/m)	60
Power (w/m)	7.2
Operating Temperature	-25°C - 60°C
Storage Temperature	-30°C - 70°C
IP Grade	IP33/ IP65/ IP67