

Specification for **60leds** RGB 5050SMD strip

Applications:

Suitable for cove and contour lighting etc. in KTV, hotel, shopping mall, home, cabinet and so on

Features:

1. RGB 5050SMD LED mounted, 60leds/m.
2. 3 types strip, IP33,IP65 and IP67
3. DC12V
4. 115 Viewing angle
5. Certificate: CE,RoHS
6. Warranty: 3years
7. 3leds per unit can be cut
8. Easy installation with double-sided adhesive tape.

1. Model: S1Q60

Non-waterproof, IP 33

Size: L5000 X W10 X H2.2 mm


LED Pitch: 16.7mm

Unite Length: 50mm

Max. 5meters per roll



Drawing:

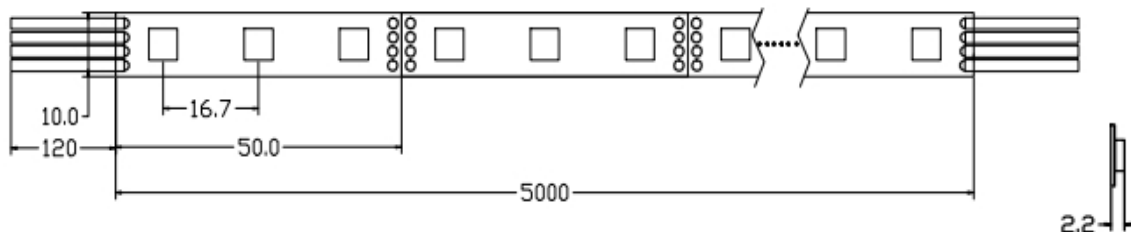

Specification for 60leds RGB 5050SMD strip

2. Model: S2Q60


Waterproof with silicone glue, IP 65

Size: L5000 X W10 X H3.3 mm


LED Pitch: 16.7mm

Unite Length: 50mm

Max. 5meters per roll

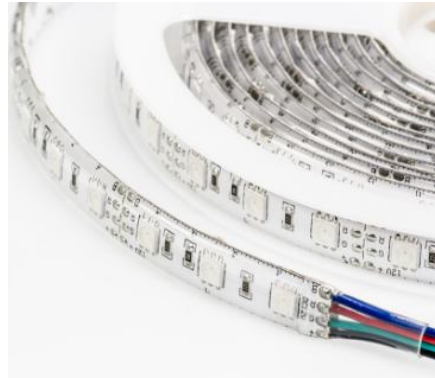

Drawing:

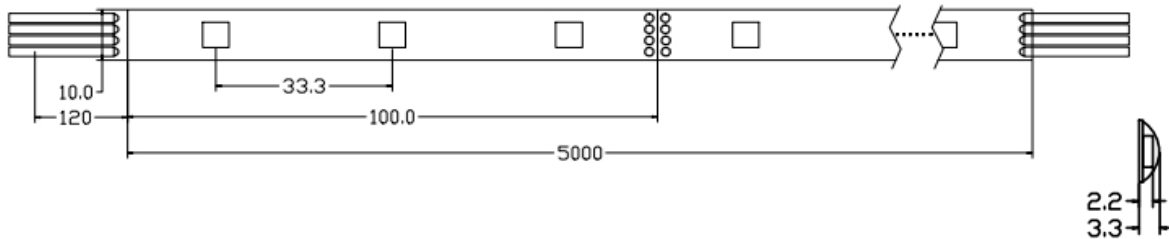

3. Model: S3Q60


Waterproof with silicone tube, IP 67

Size: L5000 X W13 X H4.4 mm


LED Pitch: 16.7mm

Unite Length: 50mm

Max. 5meters per roll

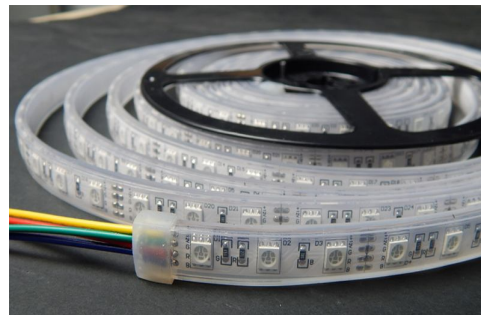

Drawing:

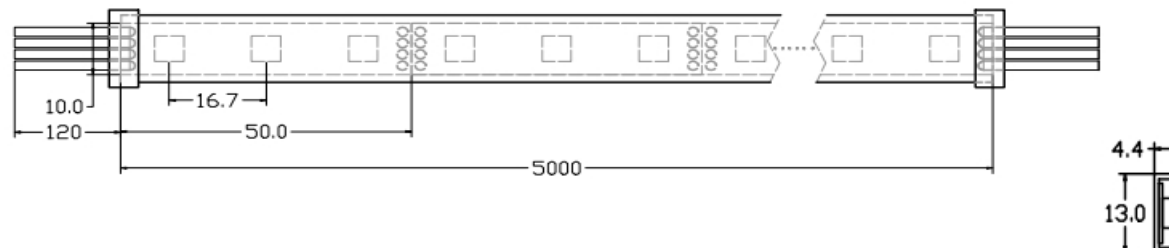

Specification for **60leds** RGB 5050SMD strip

Specification:

Model No.	S1Q60/ S2Q60/ S3Q60
Color	RGB
Working Voltage	DC12V
Beam Angle	115 degree Viewing Angle
Brightness (lm/m)	R:240/ G:360/ B:120
Current (mA/m)	60
Power (w/m)	14.4
Operating Temperature	-25°C - 60°C
Storage Temperature	-30°C - 70°C
IP Grate	IP33/ IP65/ IP67